




DZ-Lite 3000 Plus

Chemiluminescence Immunoassay System (CLIA)

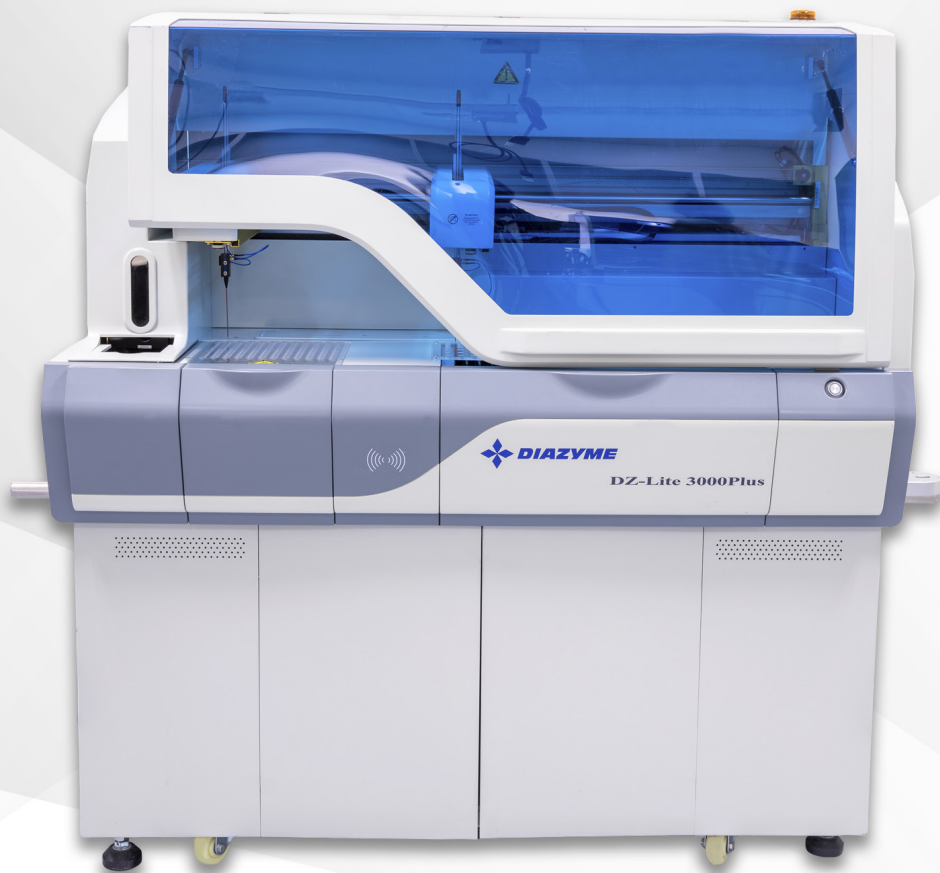

Innovations In Clinical Diagnostics

ABOUT DIAZYME

Diazyme Laboratories, Inc., an affiliate of General Atomics, is located in Poway, California. Diazyme uses its proprietary enzyme and immunoassay technologies to develop diagnostic reagents which can be used on most automated chemistry analyzers in user-friendly formats. Diazyme is a cGMP and ISO 13485 certified medical device manufacturer. Diazyme's products include test kits for diagnosis of cardiovascular disease, liver disease, cancer markers, renal disease, diabetes and electrolytes.

MISSION STATEMENT

Our mission is to improve the quality of healthcare by providing innovative products in clinical diagnostics.

CONTACT INFORMATION

DIAZYME LABORATORIES, INC.

12889 Gregg Court
Poway, CA 92064 USA

Tel: +1-888-DIAZYME
+1-858-455-4768

Fax: +1-858-455-3701

sales@diazyme.com
www.diazyme.com


DIAZYME EUROPE GMBH

Zum Windkanal 21
01109 Dresden, Germany

Tel: +49-351-886-3300
Fax: +49-351-886-3366

sales@diazyme.de
www.diazyme.com

Integrated design
Simple and smart operation
Compact size and weight

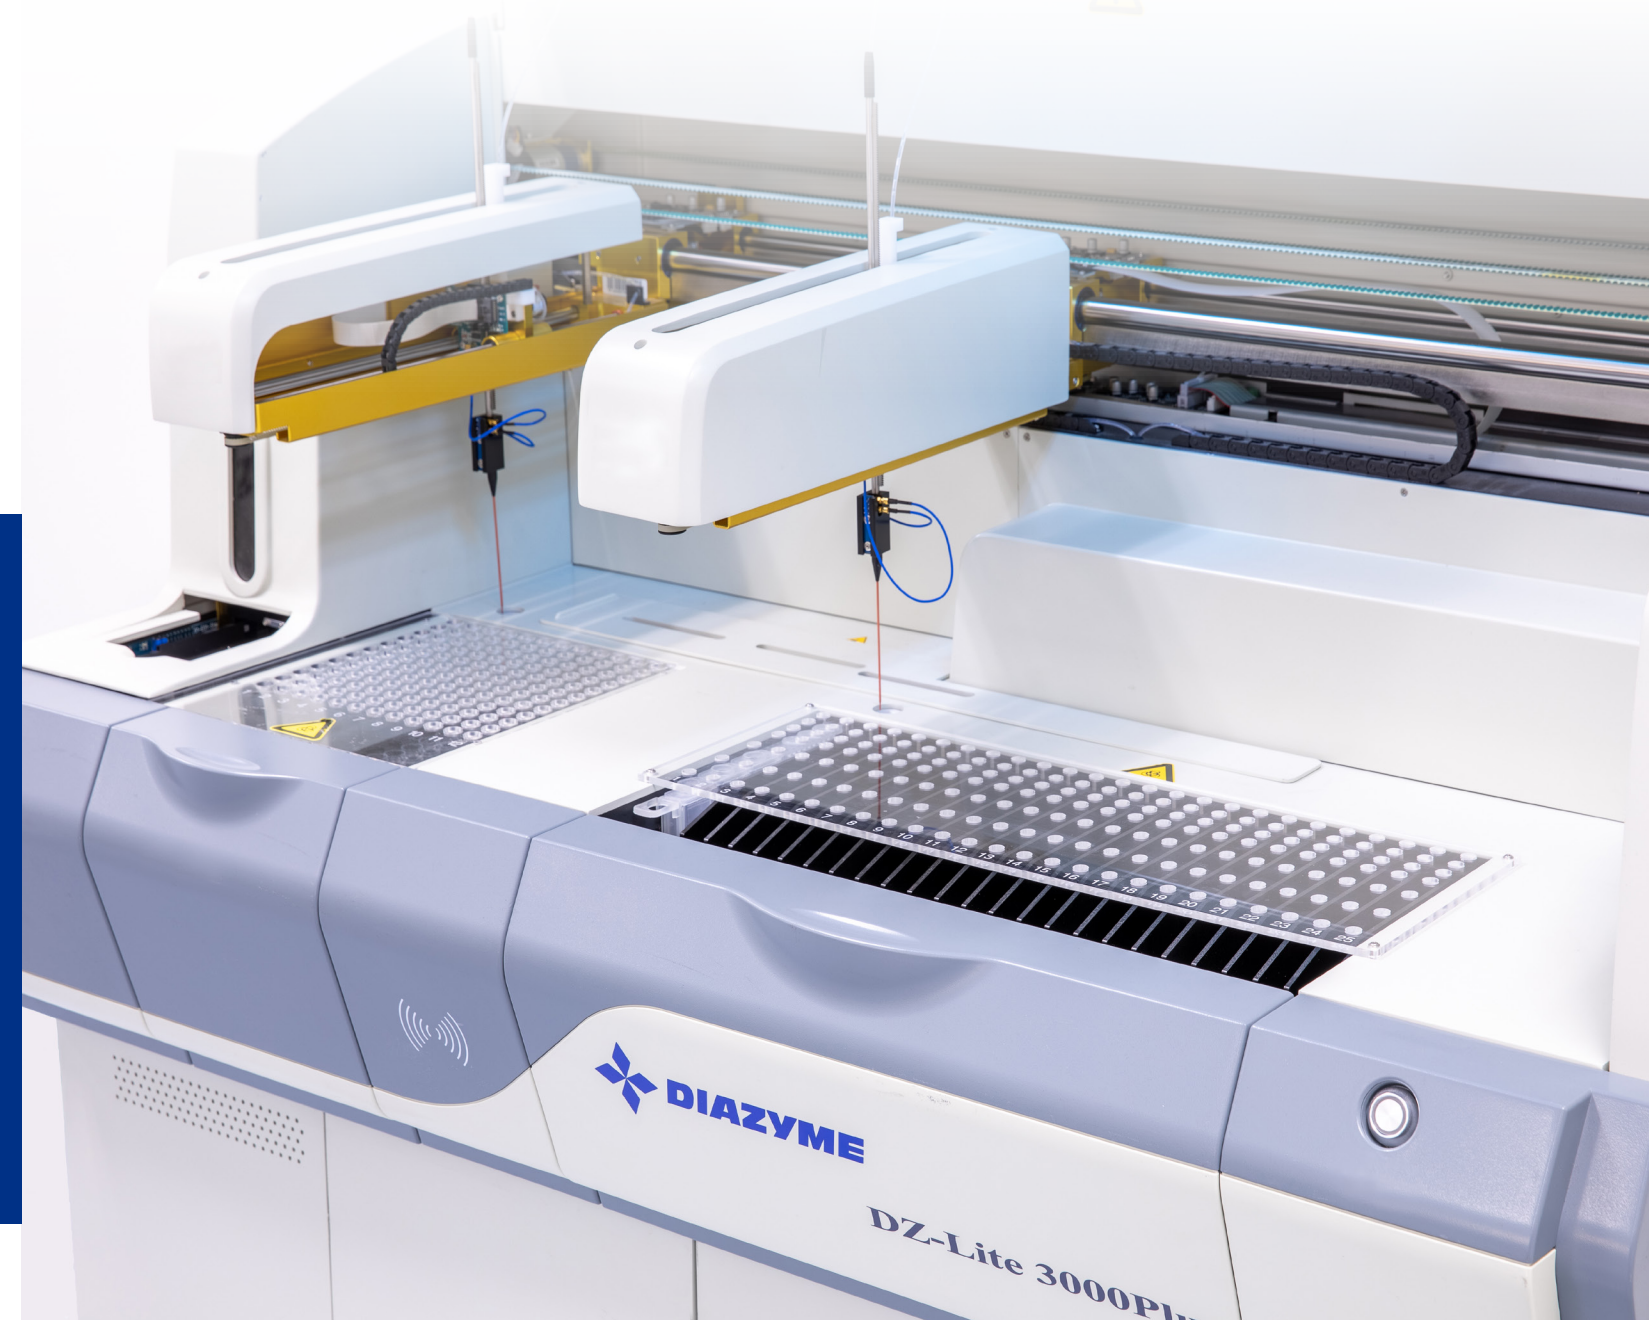

Outstanding Technology

Power of DZ-Lite™ 3000 Plus

Operation Software

Chemiluminescence Immunoassay System (CLIA)

CLIA uses two important technologies, one is labelling technology which determines reaction mode, and the other is separation technology which determines the sensitivity, accuracy and precision of the reagents


Magnetic Microbeads Separation Technology

DZ-Lite 3000 Plus uses Magnetic Microbeads. As a separation technology, it has been widely used in the field of CLIA. Compared with traditional separation technologies, it has the following advantages,

- Shortening the reaction time by enlarging the reaction area of antigens and antibodies.
- Enhancing the sensitivity by better and faster capturing of antigens and antibodies.
- Reducing inter or intra-assay discrepancies significantly by mixing the reagents thoroughly in a liquid separation platform.

ABEI Labelling Technology

Two types of labelling technologies are commonly used. One is enzyme label and the other is non-enzyme small molecule label. Enzyme label reagents are not so stable and are easily affected by the change of storage conditions. DZ-Lite 3000 Plus system applies ABEI labels. ABEI is a non-enzyme small molecule with special molecular formula to enhance stability in acid and alkaline solutions. The chemical reaction process of ABEI with sodium hydroxide (NaOH) and hyperoxide (H₂O₂) finishes in 3 seconds.

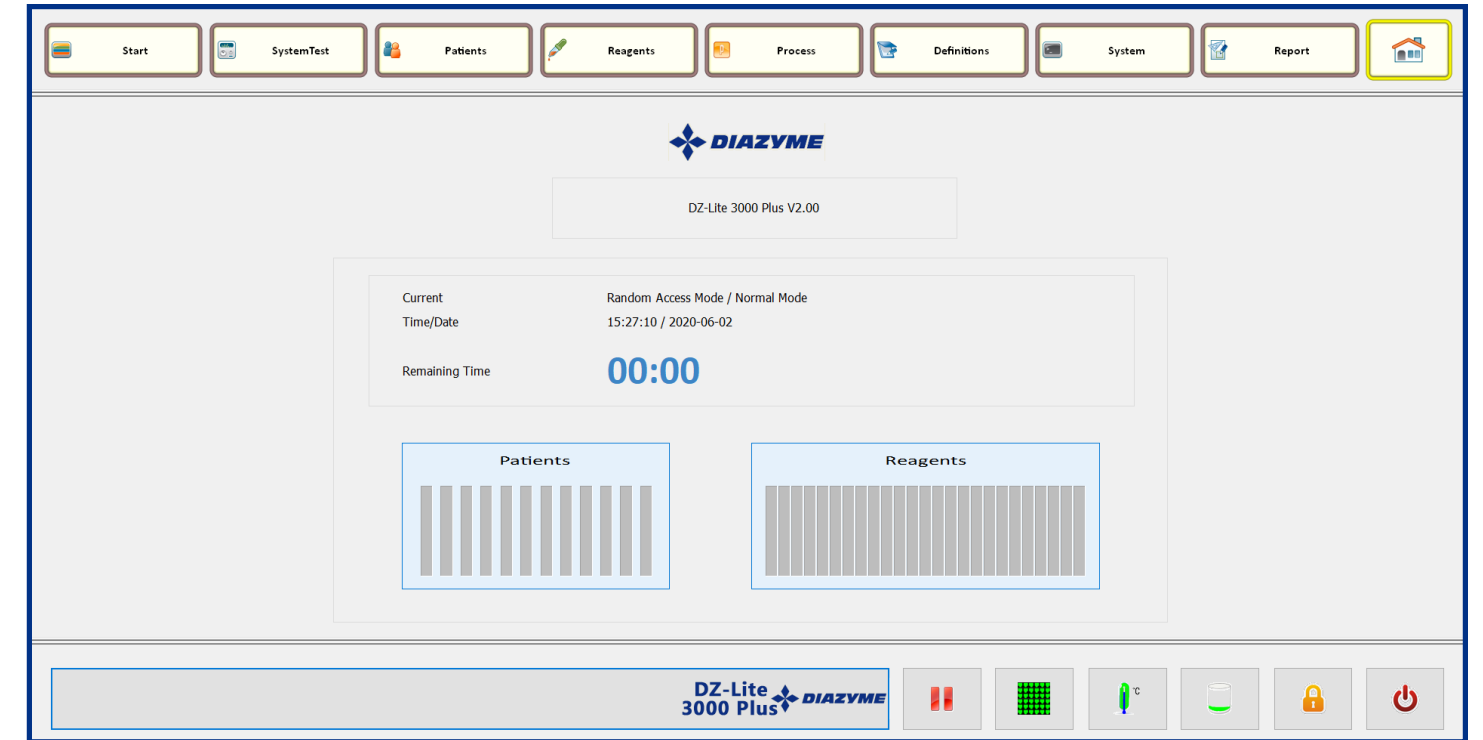

Comprehensive Software

- User-friendly interface
- Real-time status monitoring for each test
- Monitoring reagent and consumable status
- Intelligent alarm function
- Multilingual support, 10 kind of languages more languages available by request



Maintenance Guide

- Smart Maintenance with step by step guide, ensure performance reliability and reduce unnecessary service calls
- Daily, weekly and monthly maintenance guide for analyzer



Quality Control

- Westgard rules and Levy-Jennings chart for both internal and external quality control



Test Summary Function

- Test summary including system test, calibration, QC, statistics of sample, valid tests and rerun tests
- Search and review test information conveniently



Pre or Post Defined Dilution Function

- Pre- and post- dilution available for the case of high concentration sample




Bidirectional LIS Connection

- Bidirectional LIS connection by TCP/IP and COM

DZ-Lite™ 3000 Plus


Chemiluminescence Immunoassay System (CLIA)

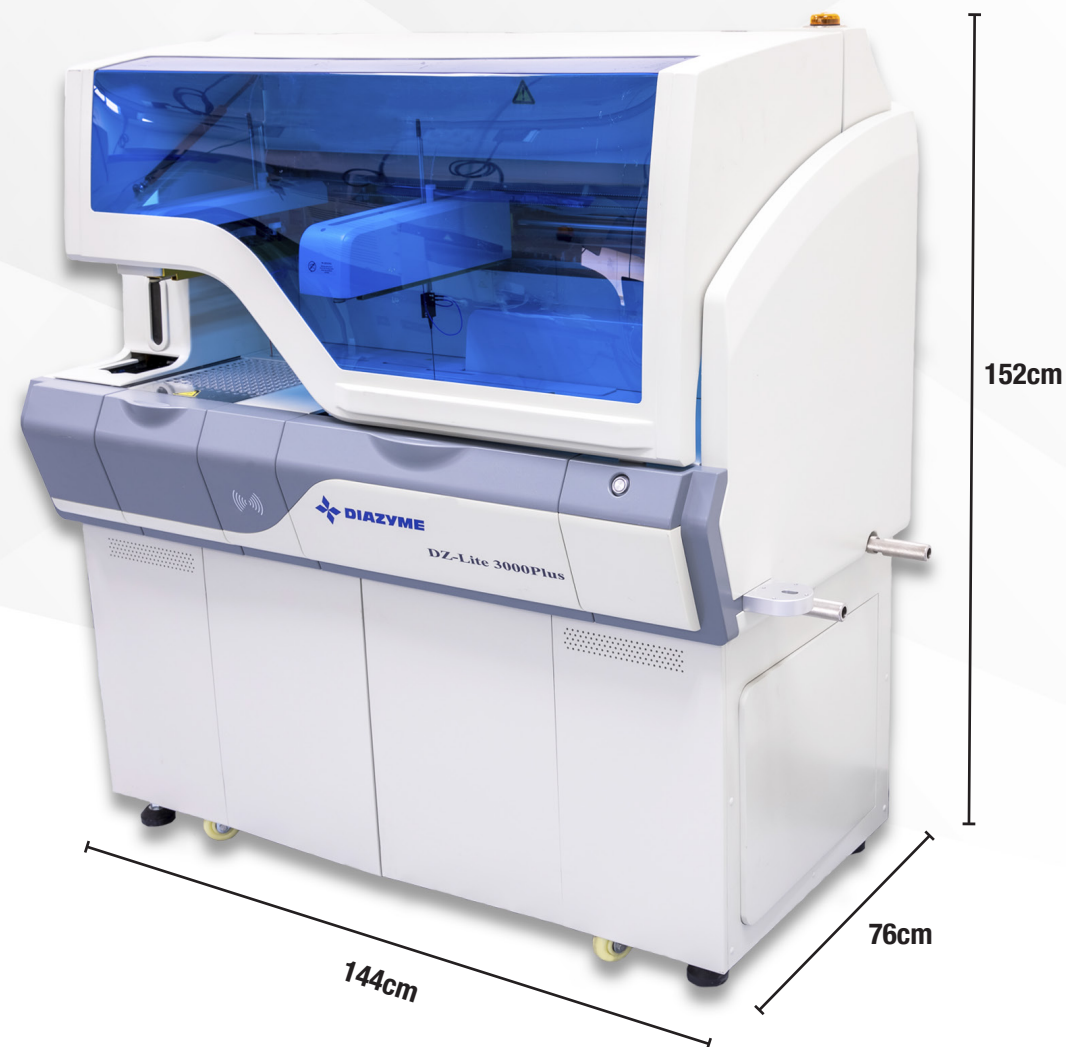

TECHNICAL SPECIFICATIONS	
Reagent Features	<ul style="list-style-type: none"> Flash chemiluminescence label – ABEI, with high sensitivity and long stability Magnetic microbeads separation, fast and efficient
Main Features	<ul style="list-style-type: none"> Throughput: up to 180 tests/hour 24 hours ready-to-use Time to first result: 17 minutes
Modes of Operation	<ul style="list-style-type: none"> Random, Batch and STAT
Sample Loading	<ul style="list-style-type: none"> Up to 144 sample tubes Continuous loading, STAT available Barcode reader recognition or analyzer automatic numbered LIS connection, automatic read sample information Refrigerated sample area with independent power supply
Reagent Loading	<ul style="list-style-type: none"> 25 reagents on board Continuous loading RFID reading all info of reagent Refrigerated reagent area with independent power supply
Reagent Integral	<ul style="list-style-type: none"> Ready-to-use, no pretreatment required Including calibrators RFID tag storing all info of reagent RFID tag with built-in master curve 2-point calibration to adjust master curve Calibration stability: Max 4 weeks
Other Features	<ul style="list-style-type: none"> Clot detection Liquid level detection Automatic and optional ratio for high sample dilution Constant $36.8 \pm 0.5^\circ\text{C}$ incubation
Operation System	<ul style="list-style-type: none"> Windows 10 Dell compatible (Dual-core CPU) Color touch screen
Interconnection	<ul style="list-style-type: none"> Bidirectional LIS connection by TCP/IP and COM
Dimensions Weight	<ul style="list-style-type: none"> Input: AC 110/230 Vac. 50/60 Hz Dimension and weight: 144*76*152cm 228kg

Note: Printer not included. Printer must be compatible with Windows 10 operating system.

DZ-Lite™ 3000 Plus




Pipettor

- Aspirate reagent / sample with high speed
- Titanium needle with crush-proof function
- Clot detection & liquid level detection
- Coated with TEFLON to prevent carry-over
- inner & external washing




Automated cuvette loader

- Capable of loading modules continuously
- Up to 120 reaction modules




Sample area

- Up to 144 samples on board with barcode
- Continuous loading & cooling function
- Random, batch, and STAT modes



Incubator

- 16 incubate slots (96 tests at the same time)
- The temperature is 36.8°C ±0.5°C




Chamber

- High-sensitivity and low-noise PMT
- Cuvettes detection and anti-overflow



Washer

- Strong magnetic field helps better separation
- Three pairs of washing needles with anti-overflow



Reagent area

- Cooling function
- 25 Reagents on board, continuous loading
- RFID label storing reagent information
- RFID tag, high reliability
- Easy and fast for adding and updating



DIAZYME LABORATORIES, INC.

A Life Science Affiliate of General Atomics

12889 Gregg Court, Poway, CA 92064 USA

Tel: +1-858-455-4768 | +1-888-DIAZYME | Fax: +1-858-455-3701

Web: www.diazyme.com | Email: sales@diazyme.com

Diazyme Europe GmbH

Zum Windkanal 21 01109 Dresden, Germany

Tel: +49-351-886-3300 | Fax: +49-351-886-3366

Web: www.diazyme.com | Email: sales@diazyme.de

Diazyme Shanghai Co., Ltd.

Room 201, 1011 Halei Road Zhangjiang Hi-tech Park

Shanghai, 201203 People's Republic of China

Tel: +86-21-51320668 | Fax: +86-21-51320663

Web: www.lanyuanbio.com | Email: service@lanyuanbio.com